

CRACKER

Product Code: FL410

Cracker Acoustic Panel family is an ideal solution for commercial and educational areas. The Cracker promotes a personalized and acoustically balanced workspaces without interruption to a collaborative environment. Products can be adjusted and moved to suit the dynamic requirement of a fast paced modular office. This collection offers acoustic wall panels, ceiling panels, cloud lighting, and alternative acoustical solutions.

Specification

- Composition: 100 % polyester (recycled PET appx. 50 %)
- Material Weight: 1300g /m² (+/- 5 %)
- Material Thickness: 6mm Natural & Mandarin colors (+/- 10 %)
- Panel Weight: 4,8 kg / per pcs. (+/- 5 %)

Performance

- Acoustic Rates: 0,55 NRC (EN-11654) with no air gap
- Fire Rates: B, S1, d0 (EN-13501)
- Light fastness: 6+ (ISO-105 B02)
- MAS Certified Green - CDPH Standard Method v1.2
Low VOC / Eligible for LEED v4
- Health : 99.9 % Antibacterial (ISO-20743)
Formaldehyde-free (ISO-14184)
- Moisture Absorption: >0.03 % by weight
(50°C/122°F at 90% relative humidity)
- Thermal insulating: 0,040 W/mK

Key Features & Benefits

- Available in 6 natural composite colours & 25 Mandarin colours
- Highly durable providing long-term stability and performance
- Safe, non-toxic, non-irritant & without red list chemical binders
- Recycled and recyclable

Care

- Easy to clean with a damp cloth or vacuum cleaner
- Indoor use only


Installation

- Designed for easy assembly with 2 installation options.


With the guidance of the montage template, neodymium magnets or velcro disks are screwed to the surface. Fix the brackets behind the panel to the magnets or velcro disks.

Dimensions(mm):


L: 2400mm
W: 800mm
D: 50mm

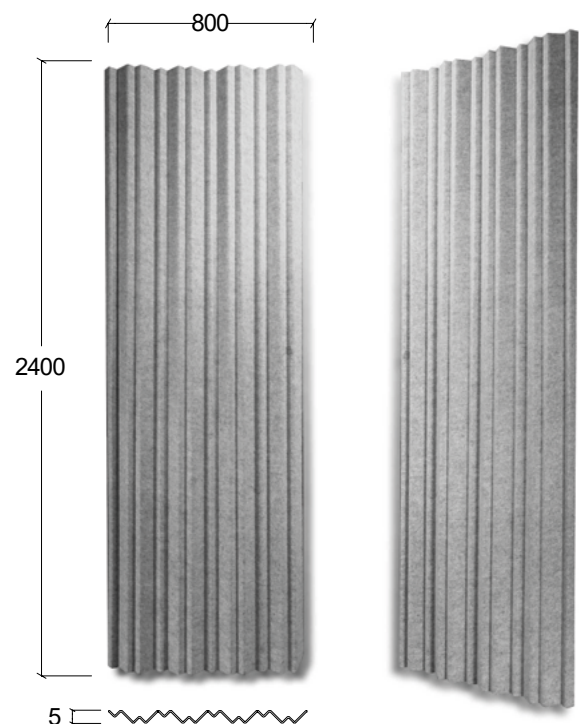

Magnets or Velcro discs



Back Side - Brackets



Front Side

